



TQJ-900/1800XTG-A

806 to 960 MHz

Features

- Omnidirectional Indoor antenna
- 3 dBi Antenna Gain
- Vertical Polarization
- Surface mount in Drop Ceiling or Solid Ceiling
- Type N Female Connector

Applications


- In-Building Wireless Access Points

Description


The Omnidirectional Indoor Antenna TQJ-900/1800XTG-A is constructed of UL94-V0 white ABS plastic. The low profile attractive styling blends well in almost any office or home environment. Mounting is simplified with a single hole mount design to easily mount to drop ceilings or fixed ceilings. The antenna comes with a 28cm pigtail and an N Female connector standard.

Specifications

Parameter	Min	Typ	Max	Units
Frequency Range	806		960	MHz
Input Return Loss (S11)		-14		dB
VSWR		<1.5:1		
Impedance		50		Ω
Input Power			50	W
Operating Temperature	-20		+60	Deg C
Gain		3		dBi
Polarisation		Vertical		
Dimensions		180x90		(mm)
Weight		250		(g)
Connector		N Female		

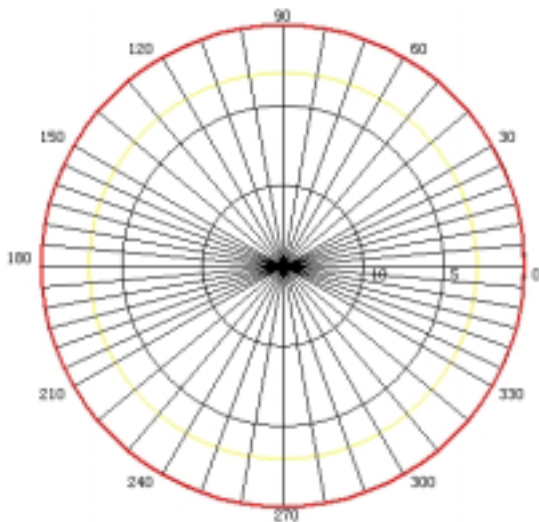

H - Plane

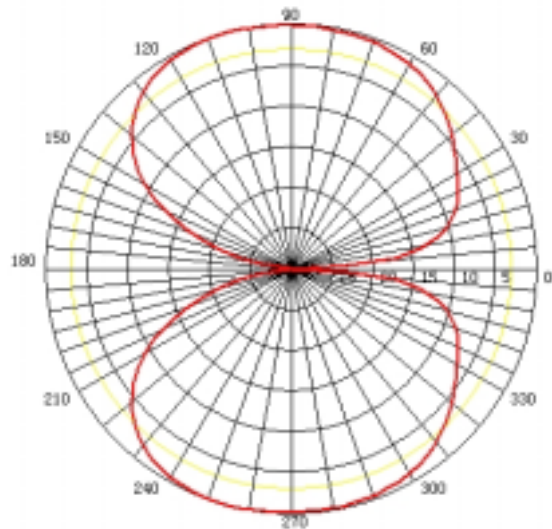

E-Plane